


Reliable special designed instrument

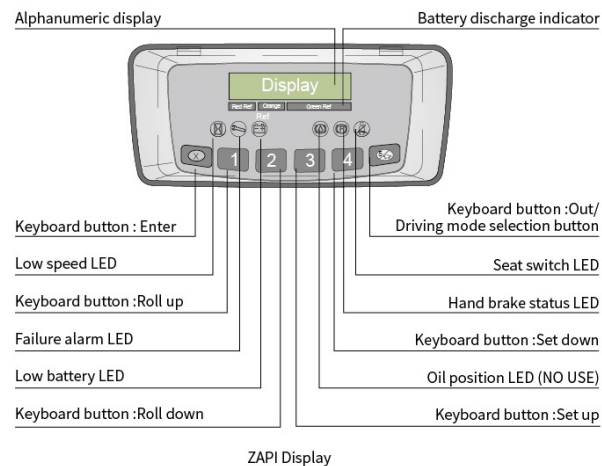

- Reliable special meter displays the whole truck' s working condition, fault detect and other important information completely which makes the operator master the whole truck condition directly and conveniently.

Standard configuration

- Standard of driver presence sensing system
- Automatic speed limitation while turning
- All solid tire
- Automatic water filling
- Intergrated fork positioner
- Full suspension seat
- Full vehicle led lights
- Double rear working lights
- Rotating beep warning light
- Automatic parking
- Four piece valve, double overload, rubber hose and Pulley block
- Domestic leoch battery
- CPD100-GB2 marking 1820 fork

Optional device

- Synchronous steering
- Electric-hydraulic braking
- Cab
- Windshield (front windshield/window, top windshield/ window, rear windshield/window)

8.5-10 t

G series battery powered counterbalanced Forklift truck (Lead acid/Lithium)



G SERIES 8.5-10 t

High stability and reliability

- Mature and reliable, excellent performance of international core components: wheel-driving unit, AC traction motor, AC pump motor and controller, etc;
- Lowering height of gravity center by optimizing the quality distribution of the whole vehicle, the load capacity of mast in high-order position is stronger than trucks with the same tonnage.

Active safety

- Active safety protection, actively slowing down and implementing the parking brake after parking when the critical components are out of order;
- System monitoring the brake temperature is too high, the vehicle limits the speed and travels with the tortoise speed;
- Automatic speed limitation while turning;
- Driver presence sensing system;
- Terminal buffer of lifting, other aspects implement active safety protection.

High efficiency and Energy-saving

- Compact body design makes the vehicle having great flexibility, moving freely as one wishes even in a small space;
- Low vehicle weight ensures low energy consumption;
- Energy-saving type hydraulic system with double pump confluence;
- Full hydraulic synchronous steering system ensures more accurate steering control (Optional);
- Power recovery has priority, piecewise superimposed electric-hydraulic braking with energy regeneration (Optional).
- The Lithium battery forklift equipped with 80V/2*200A fast charger.

Intellectualization

- The circulating cooling system based on multi-point temperature intelligent control makes the temperature of each component in the optimum working range;
- The electronic fan with independent hydraulic oil cooling adopts intelligent control to start and stop, achieving the effect of saving energy and reducing noise at the same time.

Comfortable

- Import super silent gear pump and motor damping pad to ensure low noise of vehicle;
- Fully suspension operator's seat.

Convenient maintenance

- Auto water filling (Lead acid battery) ;
- The body equips with independent interlocking vehicle fast charging interface, intelligent control and diagnosis function to ensure charging safety;
- Maintenance free wet braking;
- Within 30s after vehicle shutdown, the reversal of cooling can remove dust, maintenance free;
- The two groups of batteries are symmetrically arranged on the left and right sides, and can be quickly replaced at any time by lateral side shovel;
- The height of electric control warehouse is suitable for maintenance.


Exterior and Vision

- Fire-new exterior design, the body lines are smooth, beautiful and streamlined;
- Super-low height of balance weight without tailstock, which provides the driver with an excellent rear vision field.



HELI smart fleet management system (optional)

- Vehicle positioning
- Remote diagnosis
- Remote monitoring
- Maintenance reminder
- Battery management
- Statistical form
- Vehicle management
- Identification recognition (optional)
- Weight management (optional)
- Collision management (optional)



Integrated dual driving system



Automatic parking button




Terminal buffer of lifting




Interlocking vehicle fast charging interface




Comfortable height of operation of electric control warehouse and lock-type traction pin



Double rear working lights, revolving beacon



Integrated fork positioner




Auto water filling

G SERIES 8.5-10t


Manufacturer and technical parameters

1.01	Manufacturer		HELI															
1.02	Model		CPD85		CPD100		CPD85		CPD100									
1.03	Configuration number		GA2		GA2		GB2		GA2Li		GB2Li							
1.04	Rated capacity	Q(kg)	8500		10000		10000		8500		10000							
1.05	Load center distance	c(mm)	600		600		600 ⁽¹⁾		600		600 ⁽¹⁾							
1.06	Power mode		Lead acid battery						Lithium Battery									
1.07	Driving mode		Seated						Seated									
1.08	Wheel base	L1(mm)	2400		2580		2400		2580									
2.01	Tyre type		Solid type						Solid type									
2.02	Wheel number(front/rear)		4×/2						4×/2									
2.03	Front wheel base	W3/W4(mm)	1636/1524						1636/1524									
2.04	Tyre(front/rear)		8.25-15/250-15						8.25-15/250-15									
3.01	Front overhang	L2(mm)	660						660									
3.02	Mast tilt angle, front/rear	α/β(°)	6/9						6/9									
3.03	Height with mast retraction	H1(mm)	2700		2850		2950		2700		2850		2950					
3.04	Free lifting height	H3(mm)	180						180									
3.05	Max.Lifting height	H(mm)	3000						3000									
3.06	Overhead guard height	H4(mm)	2445						2445									
3.07	Overhead guard clearance(from face of seat)	H7(mm)	1024						1024									
3.08	Max.Height under working condition	H2(mm)	4226		4360		4510		4226		4360		4510					
3.09	Traction pin center height	H9(mm)	687		677				687		677							
3.10	Backrest height(calculated from the fork surface)	H13(mm)	1012						1012									
3.11	fork size:thickness×width×length	T×W×L4(mm)	85×175×1370				85×175×1820				85×175×1370				85×175×1820			
3.12	Truck body length(with forks)	L(mm)	4950		5130		5580		4950		5130		5580					
3.13	Truck body length(without forks)	L'(mm)	3580		3760				3580		3760							
3.14	Truck body width	W2(mm)	2116/1750						2116/1750									
3.15	Turning radius	r(mm)	3140		3320				3140		3320							
3.16	Clearance between mast and ground	H5(mm)	130/150						130/150									
3.17	Clearance between wheel base center and ground (loaded)	H6(mm)	170/180						170/180									
3.18	Right angle stacking aisle width(pallet1000×1200mm across forks , clearance 200mm)	Ast(mm)	5000		5180				5000		5180							
3.19	Right angle stacking aisle width(pallet800×1200mm along forks , clearance 200mm)	Ast(mm)	5200		5380				5200		5380							
3.20	Lateral fork adjustment (outside of fork)(min/max)	W6(mm)	420-2060						420-2060									
4.01	Travelling speed: loaded/unloaded	km/h	14/16		13/15				14/16		13/15							
4.02	Lifting speed :loaded/unloaded	m/s	0.30/0.37		0.245/0.335				0.30/0.37		0.245/0.335							
4.03	Lowering speed:loaded/unloaded	m/s	0.42/0.38						0.42/0.38									
4.04	Gradeability (loaded/unloaded)	%	15/25		15/20				15/25		15/20							
4.05	Max.Traction force(loaded)	kN	35		45				35		45							
4.06	Acceleration time(10m)loaded/unloaded	s	6/5		6/5		6/5		6/5		6/5		6/5					
5.01	Total weight(without battery)	kg	12600/9600		13200/9800		14160/10840		11660/10560		12900/11800		14160/13060					
5.02	Axle:unloaded,front/rear	kg	6370/6230		6795/6415		7020/7140		5725/5935		6495/6415		7120/7040					
5.03	Axle:loaded,front/rear	kg	19330/1770		21670/1530		21910/2250		18690/1470		21370/1530		22010/2150					
6.01	Battery voltage/capacity(discharging capacity in 5 hours)	V/Ah	80/1120		80/1240				80/808		80/1084							
6.02	Battery weight	kg	1500×2		1600×2				550×2		550×2							
7.01	Drive motor power(s2- 60min)	kW	AC17.1×2						AC17.1×2									
7.02	Lifting motor power(s3-15%)	kW	AC26.5×2						AC26.5×2									
7.03	braking motor power(s3-15%)	kW	AC 5						AC 5									
7.04	Drive motor controlling mode		MOSFET/AC						MOSFET/AC									
7.05	Lifting motor controlling mode		MOSFET/AC						MOSFET/AC									
7.06	Braking motor controlling mode		MOSFET/AC						MOSFET/AC									
8.01	Service brake		Hydraulic wet brake						Hydraulic wet brake									
8.02	Parking brake		Hydraulic, Electric switch						Hydraulic, Electric switch									
8.03	Hydraulic system working pressure	MPa	20						20									
8.04	Type of drive control		ZAPI						ZAPI									

Note 1: This model is reinforced, and the difference between GA2 and GB2 is that it has the ability of 9t at the center of 900 load. See the load curve for details.

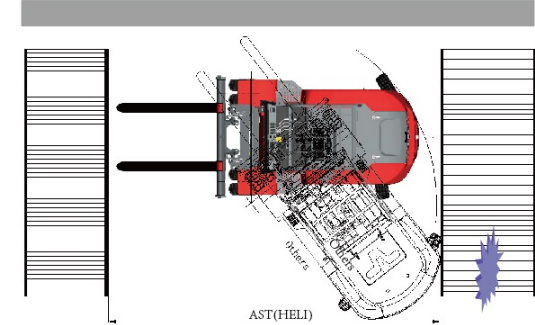


- Right angle stacking aisle width (pallet1200×1200mm,clearance 200mm)
5380mm(CPD100)
6040mm(CPCD100) (Others)

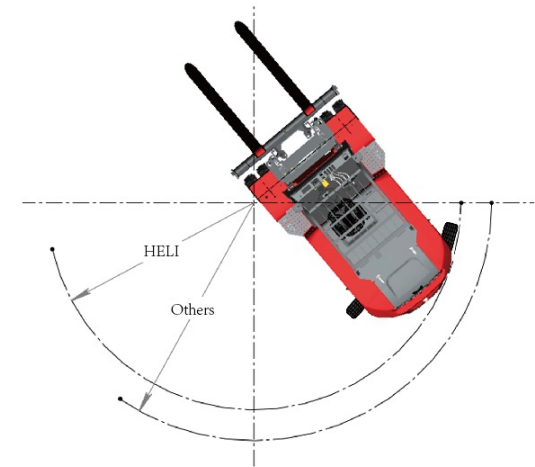

- The compact body design and smaller wheelbase allow the vehicle to sprinkle freely in a narrow space while maintaining the power and speed capable of achieving high productivity.


- Truck body length(without forks)
3760mm(CPD100)
4210mm(CPCD100) (Others)
- Turning radius
3320mm(CPD100)
3900mm(CPCD100) (Others)

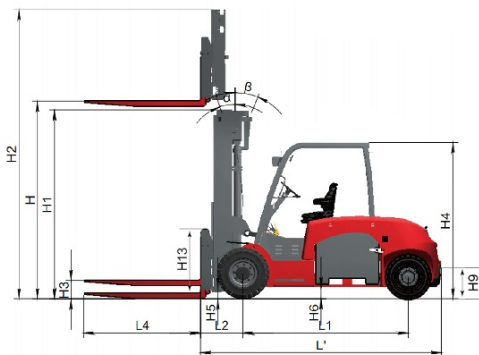

Ast: Right angle stacking aisle width

a: Clearance


b: Load Length

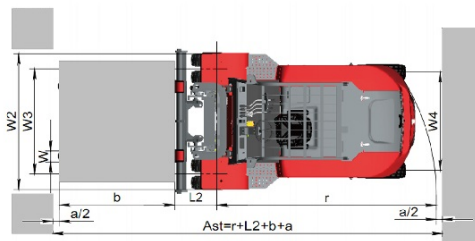

CPD100-GA2
CPD100-GA2Li

CPD100-GB2
CPD100-GB2Li

CPD85-GA2
CPD85-GA2Li

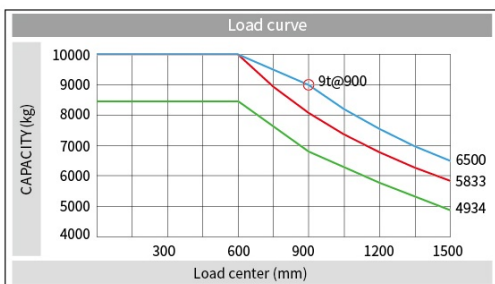

Note: The vertical axis stands for load capacity and the horizontal axis stands for load center which is calculated from the front surface of the forks to the gravity of the standard load. the standard load means a cubic with 1200mm edge length. When mast is tilted forward, using non-standard forks or loading large goods, the load capacity will be reduced. The load capacity of standard mast at different load center can be known from this load chart.

Lead acid battery

model	battery	(V) voltage (V)	Lead acid battery capacity (Ah)
CPD85	standard	80	1120
	optional	80	1240
CPD100	standard	80	1240
	optional	80	1400
		80	1550

Lithium battery charger

Lithium battery brand	ENEROC		CNSG Hong sifang		
Voltage/Capacity	80V/808Ah	80V/1084Ah	80V/800Ah	80V/1000Ah	80V/1200Ah
CPD 85	●	○	○	○	○
CPD 100	—	●	—	○	○
Low temperature preheating of lithium battery PACK	●		—		
Charger	D80V-400A-Li-124				

Note: ● standard, ○ optional, — non-configurable

8.5-10t WIDE VIEW MAST

Mast model	Max. fork height (mm)	Load capacity (load center 600mm)		Mast height, lowered		(kg) Service weight						Mast tilting angle (°) α/β
		CPD85	CPD100	CPD85	CPD100-GA2	CPD100-GB2	CPD85-GA2	CPD100-GA2	CPD100-GB2Li	CPD85-GA2Li	CPD100-GA2Li	
M250	2500	8500	10000	2450	2600	2700	11910	13090	14060	10970	12790	6/9
M270	2700	8500	10000	2550	2700	2800	11970	13120	14090	11030	12820	6/9
M300	3000	8500	10000	2700	2850	2950	12600	13200	14160	11660	12900	6/9
M330	3300	8500	10000	2850	3000	3100	12700	13250	14220	11760	12950	6/9
M350	3500	8500	10000	2950	3100	3200	12840	13290	14260	11900	12990	6/9
M375	3750	8500	10000	3075	3225	3325	12920	13340	14310	11980	13040	6/9
M400	4000	8500	10000	3250	3400	3500	13100	13380	14350	12160	13080	6/9
M425	4250	8500	10000	3375	3525	3625	13250	13450	14420	12310	13150	6/9
M450	4500	8500	10000	3500	3625	3750	13370	13500	14470	12430	13200	6/9
M475	4750	8500	10000	3625	3775	3875	13520	13560	14530	12580	13260	6/9
M500	5000	8500	10000	3750	3900	4000	13620	13600	14570	12680	13300	6/9
M550	5500	8000	9500	4050	4200	4300	13950	13900	14870	13010	13600	3/9
M600	6000	7500	9000	4300	4450	4550	14150	13950	14920	13210	13650	3/9
M650	6500	-	8500	-	4700	4800	-	14000	14970	-	13700	3/9
M700	7000	-	8000	-	5050	5150	-	14050	15020	-	13750	3/9

WIDE VIEW FULL FREE 3-STAGE MAST

Mast model	Max. fork height (mm)	Load capacity (load center 600mm)		Mast height, lowered		Free lift		Service weight					Mast tilting angle (°) α/β
		CPD85	CPD100	CPD85	CPD100	CPD85	CPD100	CPD85-GA2	CPD100-GA2	CPD100-GB2Li	CPD85-GA2Li	CPD100-GA2Li	
ZSM360	3600	7500	9000	2450	2570	1090	1150	13540	13960	14930	12600	13660	6/9
ZSM400	4000	7500	9000	2575	2700	1215	1280	13770	14050	15020	12830	13750	6/9
ZSM435	4350	7500	9000	2700	2820	1340	1400	13940	14130	14800	13000	13830	6/9
ZSM450	4500	7500	9000	2775	2870	1415	1475	14040	14170	15140	13100	13870	6/6
ZSM480	4800	7500	9000	2850	2970	1490	1550	14200	14240	15210	13260	13940	6/6
ZSM500	5000	7500	9000	2950	3035	1590	1615	14310	14290	15260	13370	13990	6/6
ZSM540	5400	7000	8500	3075	3225	1775	1805	14470	14420	15390	13530	14120	3/6
ZSM600	6000	6500	8000	3375	3425	2015	2005	14760	14560	15530	13820	14260	3/6
ZSM650	6500	6000	7500	3600	3590	2240	2170	14880	14680	15650	13940	14380	3/6
ZSM700	7000	5500	7000	3750	3855	2390	2435	15050	14850	15820	14110	14550	3/6
ZSM800	8000	4500	6000	4135	4240	2640	2685	15260	15060	16030	14320	14760	3/6



RENEWABLE ENERGY TECHNOLOGIES

With the use of the excellent load-sensing steering system and AC controlling renewable energy technologies, the forklift is more energy-saving and the working hour of the battery is extended by 15%.

15%